

# ARCHITECTURAL Flexible LED Strip

## LED Strip - Ultra Thin 3.5mm LED Strip

*The Ultra Thin 3.5mm LED Strip is extremely versatile and suitable for high light output in applications where space is limited.*

### Applications:


- Architectural shadow line applications
- Narrow applications

### Product Specification:

Input Voltage: **24VDC**  
 Power Consumption: 9.6 watts per meter  
 LED Quantity: 140 x SMD LEDs  
 LED Lifespan: 80,000 hours  
 IP Rating: IP20  
 Lumens: 1000Lm per/M  
 LED Spacing: 7.14mm  
 Cutting Interval: 50mm  
 Beam Angle: 120°  
 Dimensions (WxH/mm): 3.5x1  
 Operating Temp: -20~45°C  
 Weight: 150g  
 Roll Length: 5m

**IES files available on request.**

**Binning in 3 step MacAdam**

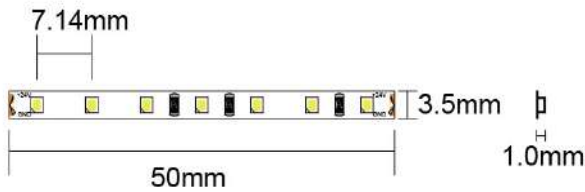

Item No	Product Code	Description
14570	LED-FLS3.5140B-CW	Ultra Thin 3.5mm LED Strip-140LEDs Cool White <b>6000K</b> 24V 9.6W 1000Lm 5m reels
14571	LED-FLS3.5140B-NW	Ultra Thin 3.5mm LED Strip-140LEDs Neutral White <b>4000K</b> 24V 9.6W 1000Lm 5m reels
14572	LED-FLS3.5140B-WW	Ultra Thin 3.5mm LED Strip-140LEDs Warm White <b>3000K</b> 24V 9.6W 1000Lm 5m reels
14573	LED-FLS3.5140B-UW	Ultra Thin 3.5mm LED Strip-140LEDs Ultra Warm <b>2500K</b> 24V 9.6W 1000Lm 5m reels

**When Colour Consistency and Lumen Depreciation Matter**